

# Drop

## DATA SHEET

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

NOTES: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

DATE: \_\_\_\_\_

### GENERAL

**Product Code:**

DRP-D-400 / DRP-D-600 / DRP-D-800

**Luminaire Type:**

Pendant

**Body Construction:**

Highest grade extruded aluminum

**Body Surface Finishes:**

Texture White / Texture Black

**IP Rating:**

40




### PHYSICAL

**Dimension  $\Phi$  x H x W:**

400x55x28mm 600x55x28mm 800 x55x28mm

**Fixing System:**

1500mm long steel wires with height adjustment system

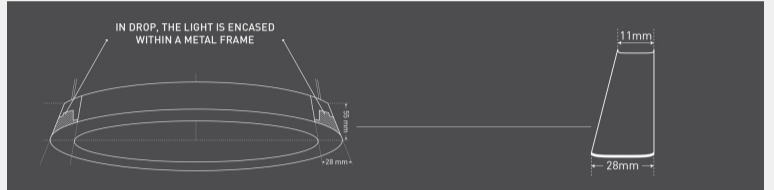

### LED

**Light Source:**

LED

**CCT:**

3000K / 4000K / 5700K / TW (Tunable White)  
2700-6500K

**CRI:**

80+, 90+ (Available on request)

**MacAdam Step:**

3

### OPTICAL

**Light Distribution:**

Direct

**Diffuser:**

Satin finished Injection molded PC

### ELECTRICAL

**System Wattage:**

30W / 45W / 60W

**Luminous Flux:**

2100lm / 3150lm / 4200lm

**Power Factor:**

0.94

### DRIVER

Non-Dimmable

DALI Dimmable

0-10V Analogue Dimmable

Bluetooth 4.0 CASAMBI remote control through App